

# COMMISSIONING SOLAR FABRIC BLIND WITH GAPOSA MOTOR

## 1. OPENING THE BOX

### ZIP135

- loosen screws securing the front panel of the box to the side covers
- remove the front panel of the box

### ZIP110/150

- remove the front panel of the box by pressing the locking springs

## 2. CONNECTING THE BATTERY AND THE MOTOR

- connect the battery and motor cable - the motor may make a short movement

## 3. CHECKING THE WIRING

- arrange internal cabling in the box, that ensure the cables do not interfere with the fabric

## 4. CLOSING THE BOX


- reinstall the front panel of the box

## 5. PAIRING THE REMOTE CONTROL

- press and hold the PROG-TX button until the motor moves
- check the direction of rotation and release PROG-TX
- **within 5 seconds, press the arrow on the remote corresponding to the direction the motor moved**
- the remote is now paired with the motor

## 6. SETTING MOTOR LIMITS

- hold the PROG-FC button until the motor moves
- press and hold the Up ↑ button until the desired upper position is reached
- press the Stop □ button
- press and hold the Down ↓ button until the desired lower position is reached
- press the Stop □ button – the motor will jog
- the end positions are now stored

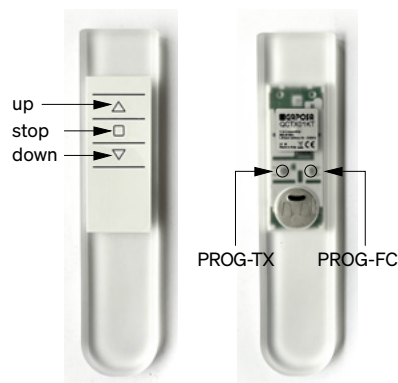

## 7. TROUBLESHOOTING

If the motor doesn't move when pairing.

- the battery may be undercharged → please recharge
- the motor memory was not cleared at the factory → reset memory:
  - **disconnect the battery for at least 30 seconds, then reconnect**
  - within 8 seconds, press and hold PROG-TX and STOP □ on any Gaposa remote until the motor makes a long jog
  - the motor memory is now erased
  - continue with remote pairing



More info available via QR code: Gaposa settings guide.